

Software

Survey Master

Compatible with most of Android devices

Easier survey workflow via Wizard function

Support up to 60° IMU tilt compensation



Support all survey modes, including Static, PPK and RTK

Support Surface Stake, Mapping Survey and etc. to serve various survey tasks


Support CAD import and directly use for stake out operations

Support Convert function from ComNavBinary raw file to RINEX


Optional

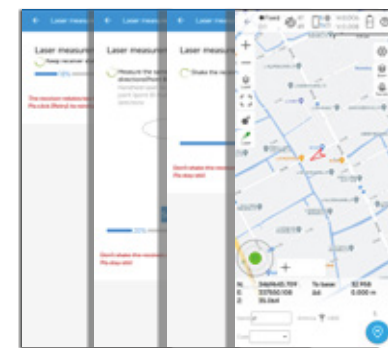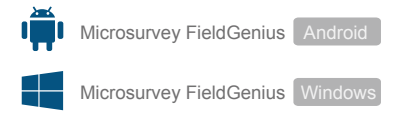

IMU Tilt Survey

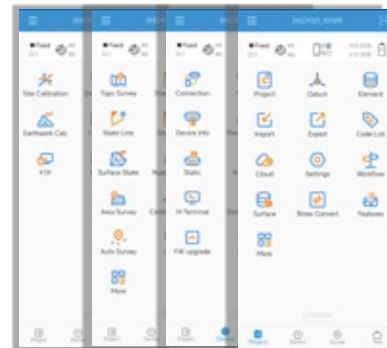

New Interface

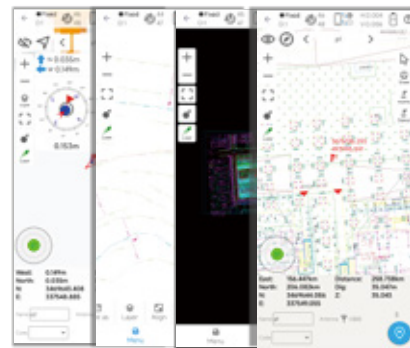

CAD Basemap and Stake

Post-processing Software

SinoGNSS Compass solution software

Provide the complete GPS/GLONASS/BeiDou/GALILEO post-processing solution


Support GNSS observation data in RINEX and ComNav Raw Binary Data formats

Support different post-processing in static and kinematic modes

Output analysis reports in various formats (web format, DXF, TXT, KML)

Supports DJI's P4R data format. Processing results can be imported into photogrammetry

and 3D modeling software directly

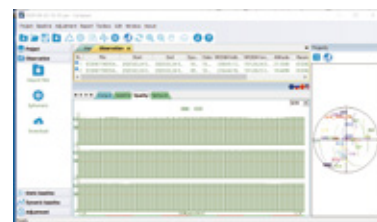

N5 GNSS Receiver

GNSS Surveying System

Ver.2023.3.8

Signal Tracking

1198 channels for simultaneously tracking satellite signals

GPS: L1C/A, L2C, L2P, L5

BeiDou: B1I, B2I, B3I, B1C, B2a, B2b

GLONASS: L1, L2, L3

Galileo: E1, E5a, E5b, E6, E5 AltBOC

QZSS: L1C/A, L1C, L2C, L5

Navic: L5

SBAS: WAAS, EGNOS, MSAS, GAGAN, SDCM, BDSBAS

L-Band¹

Performance Specifications

Cold start: <50 s

Warm start: <30 s

Hot start: <15 s

Initialization time: <10 s

Singal re-acquisition: <1.5 s

Initialization reliability: >99.9%

Positioning Specifications

Mode	Accuracy
Static and Fast Static	2.5 mm + 0.5 ppm Horizontal 5 mm + 0.5 ppm Vertical
Long Observations Static	3 mm + 0.1 ppm Horizontal 3.5 mm + 0.4 ppm Vertical
Real Time Kinematic	8 mm + 1 ppm Horizontal 15 mm + 1 ppm Vertical
DGPS	<0.4 m RMS
SBAS	1 m 3D RMS
Standalone	1.5 m 3D RMS
PPP	10cm Horizontal and 20cm Vertical

Communications

1 Serial port (7 pin Lemo)

- Baud rates up to 921,600 bps

Enhanced UHF modem²: Tx/Rx with full frequency range from 410-470 MHz³

- Transmit power: 0.5-2 W adjustable

- Range: 15 km⁴

WiFi/4G modem

- LTE-FDD: B1/B2/B3/B4/B5/B7/B8/B12/B13/B18/B19/B20/B25/B26/B28

- LTE-TDD: B38/B39/B40/B41

- WCDMA: B1/B2/B4/B5/B6/B8/B19

- GSM: B2/B3/B5/B8

Position data output rates: 1 Hz, 2 Hz, 5 Hz, 10 Hz, 20 Hz

2 LEDs (indicating Satellites Tracking and RTK Corrections data)

1 OLED Display and 2 Function buttons

Bluetooth[®]: V 4.0 protocol, compatible with Windows OS and Android OS

Calibration-free IMU integrated for Tilt Survey

Up to 60°tilt with 2.5 cm accuracy

Data Format

Correction data I/O:

- RTCM 2.X, 3.X, CMR (GPS only), CMR+ (GPS only)

Position data output:

- ASCII: NMEA-0183 GSV, RMC, HDT, VHD, GGA, GSA, ZDA, VTG,

GST; PTNL, PJK; PTNL, AVR; PTNL, GKG

- ComNav Binary update to 20 Hz

Physical

Size(W × H): Φ 15.5 cm × 7.3 cm

Weight: 1.2 kg with two batteries

Environmental

Operating temperature: -40 °C to + 65 °C (-40 °F to 149 °F)

Storage temperature: -40 °C to + 85 °C (-40 °F to 185 °F)

Humidity: 100% non-condensing

Waterproof and dustproof: IP67, protected from temporary immersion

to depth of 1 m

Shock: Designed to survive a 2 m drop onto concrete

Electrical and Memory

Input voltage: 7-28 VDC

Power consumption: 1.7 W⁵

Li-ion battery capacity: 2 × 3400 mAh, up to 25 hours typically

Memory: 8 GB⁶

Software

Survey Master Android-based data collection software

Carlson SurvCE field data collection software (optional)

MicroSurvey FieldGenius field data collection software (optional)

- PPP service is optional.
- UHF modem is default configuration and it can be removed according to your specific needs.
- Integrated UHF ranges from 410 to 470 MHz.
- Working distance of internal UHF varies in different environments, the maximum distance is 15 Km in ideal situation.
- Power consumption will increase if transmitting corrections via internal UHF.
- 8GB is the default internal memory and optional 16GB, 32GB is available to order. Please clarify when placing the order.

Specifications subject to change without notice.

SinoGNSS
By ComNav Technology Ltd.



N5 IMU RTK GNSS RECEIVER

A reliable IMU RTK receiver you can really count on in the field!*

*From our filed testing statistics, with the IMU will increasing over 20% surveying productivity.


N5 IMU RTK

Up to 60° tilting compensation, no need to center the bubble, enables to measure quickly and acquire the precise position easily.

More Flexible


With in-built IMU and adopted self-developed core algorithm, the N5 IMU GNSS Receiver is free of magnetic interference and calibration, and can bring the accurate and reliable surveying results.

More Reliable

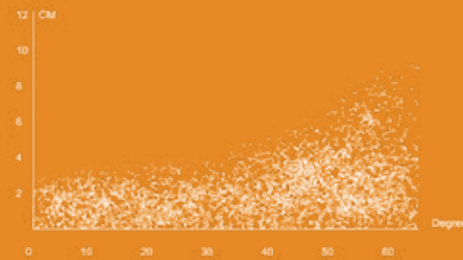

One-time adjustment for successive tilting measurement with centimeter-level accuracy increases work efficiency.

More Efficient

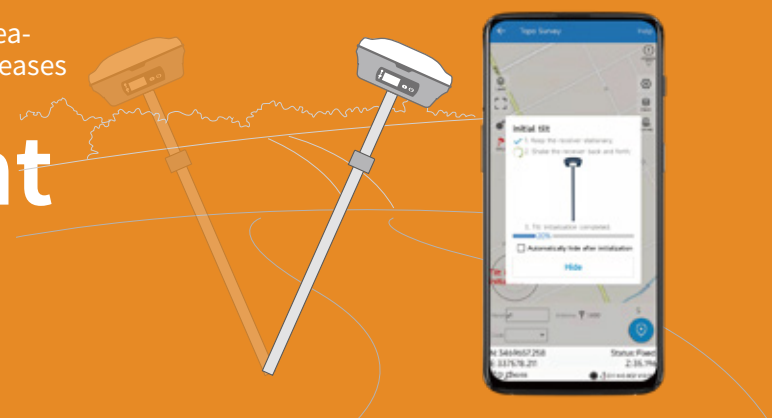

Features



Full constellations tracking

Powerful tracking capability with 1198 Channels
Support all current and future GNSS constellations
Improved fixed rate by integrated with new anti-interference algorithm technology



6800mAh Large Li-battery

Last over 25hrs' work time.
Support mobile charging, no worry about power-off



Rugged housing

IP 67 waterproof and dustproof
Survive a 2m drop onto concrete



Industry-leading low power consumption

1.7w power consumption in static mode, which prolongs working time and reduces heat generation



Enhanced OLED Display

Sunlight readability for a clear, easy-to-read viewing experience
Handle all of surveying operations on screen freely



Enhanced UHF* for long range

Up to 15km work range with 2W power consumption
Integrated UHF ranges from 410 to 470 MHz with 12.5 KHz channel spacing



Web-based UI

Available for users to check receiver status via the web UI.
Easily download the static data without connecting cable



Seamlessly Work with GNSS Network RTK Corrections

Perfectly work with all kinds of CORS world-wide with in-built 4G modem

* UHF is removable according to specific regulation in different countries.

R60 Data Collector

5.5 inch sunlight readable screen
1080P HD display

Patent for design,
ergonomic operation

With advanced NFC,
tedious matching is a thing of the past

9000mAh Li-Polymer Battery
for continuously working 30+ hours
QC3.0, 0.5h charging enables all-day use

Survive a 1.6m drop onto the concrete
Anti-static design, excellent heat dissipation

Physic full QWERTY keyboard
speeds up working efficiency

5.0 Dual-mode Bluetooth, ultra long range Bluetooth connection

Qualcomm 8-core processor
Android 12 operation system
with GMS certificate

4+64 Memory
Open CAD drawing in seconds



Qualcomm



1080P Resolution



5.5" Display



Full QWERTY



Android 12



LARGE CAPACITY



IP67