


Manual Total Station

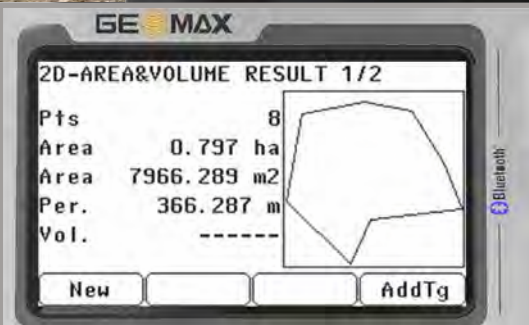

Advanced Software

- Advanced application package
- Intuitive user interface
- Graphical guidance

neXus EDM

- 500 m non-prism range
- High Precision
- High Reliability

Advanced black & white display

- Largest display in class
- Highest resolution in class
- Ergonomic design

Zoom25 Series

If you don't want to compromise on quality: The GeoMax Zoom25 series is your choice suitable for all standard surveying tasks.



Zoom25 neXus	Distance measurement on prism
Zoom25 neXus5	Distance measurement on reflector and 500m non-prism*

ANGLE MEASUREMENTS

Accuracy	1" (0.3 mgon), 2" (0.6 mgon), 5" (1.5 mgon)
Display resolution	1"
Method	Absolute, continuous, diametrical
Compensation	Quadruple axis

DISTANCE MEASUREMENTS


Prism	3,500 m / 2 mm + 2 ppm
Non-prism	500m / 2 mm + 2 ppm
Footprint	8 x 20 mm**

PHYSICAL SPECIFICATIONS

Weight	5.1 kg (incl. battery & tribrach)
Operating temp.	-30°C to 50°C***
Protection class	IP55 dust and waterproof
Humidity	95 %, non-condensing

* Optimal conditions to Kodak Grey Card (90% reflectivity)
 ** At 50 m distance
 *** Optional tested polar version, standard -20°C to 50°C
 **** Battery time may be shorter depending on conditions.
 All trademarks and trade names are those of their respective owners.

Distance meter (Prism Mode): Laser class 1 in accordance with IEC 60825-1 resp. EN 60825-1; **Laser plummet:** Laser class 2 in accordance with IEC 60825-1 resp. EN 60825-1;
Distance meter (Non-Prism Mode neXus): Laser class 3R in accordance with IEC 60825-1 resp. EN 60825-1



11/21 867503 en
 Copyright GeoMax AG.
 Illustrations, descriptions and technical specifications are not binding and may change.



Learn more at:
geomax-positioning.com

The enhanced design of Zoom25 protects the instrument against dust and water jets from any direction even under low temperatures down to -30°C.

A fast, simple and flexible data transfer is ensured by the incorporated RS232, USB and Bluetooth® technology.

With its included powerful application package, intuitively to operate on a large, high resolution display, combined with an extra-long battery life, the Zoom25 makes you more productive than ever before.

INTERFACE

Keyboard	Full alphanumeric, dual face (opt.)
Display	High resolution (280x160 pixel), 8 lines x 30 characters, illuminated
Data recording	Internal memory; 50,000 pts
Interface	USB, serial & external power
Removable memory	USB memory stick
Bluetooth	Device Class1

POWER SUPPLY

Internal battery	Removable Li-Ion
Operating time****	36 h (continuous angle), 16h (continuous distance measurement every 30s)

PLUMMET

Type	Laser point, adjustable brightness
Accuracy	1.5 mm at 1.5 m instrument height

OPERATING SYSTEM

Microsoft®	Windows embedded CE
------------	---------------------



GEOMAX AUTHORISED DISTRIBUTION PARTNER